

HIGH PERFORMANCE SPECIALTY POLYMER SIDING SYSTEM

*A look that lasts forever*



**NOVIPRO™** HAND-CUT STONE SIDING PANEL

**FAST-**  
series **F11**

Adding distinction and refinement to your home at a fraction of the cost

**NOVIK**  
INNOVATIVE POLYMERS




## New Performance Features



- Replicates the appearance of real masonry at a fraction of the cost.
- Easy-to-install resulting in considerable savings on labor.
- Ideal for remodeling projects as it requires no modifications to foundation.
- Made of injection molded copolymer for superior quality.
- Resists warping and impact at extreme temperature variations.
- Superior quality coating on blended colors with U.V. stabilizer to prevent discoloration.
- Accessories available in matching colors (ex. Corners, starter strips, J-channels).
- Products from different production runs can be mixed and matched.



**Virtually maintenance-free**



**1** Nail locators that facilitate installation by indicating precise nail locations.



**3** Superior interlocking system designed and tested to withstand hurricane windload.



**3** Panels are held securely in place with extra long lock tabs that engage easily for faster and easier installation.

**Dimensions**  
 (18.5" x 48" / 46,99 cm x 121,9 cm)  
 9 panels / approx. 50 square feet per carton

**Stone corner**



# NOVIPRO™ HAND-CUT STONE SIDING PANEL FAST-FIT

Adding distinction and refinement to your home at a fraction of the cost

The NOVIPRO™ Hand-Cut Stone replica siding system can give your home a fresh look and add distinction and refinement at a fraction of the cost.

The NOVIPRO™ polymer panel can be very quickly installed and used to give your home a natural look by replicating the intricate elements of real stone used on traditional homes.

Ideal for feature walls on your home, foundations, entryways, interior feature walls or on any walls on your house.


## Testing performed

Test	Standard testing	Result for NOVIPRO™
Fire rating	In accordance with E84	Class C fire resistance
Impact	In accordance with ASTM3679	Pass
Accelerated U.V. exposure	In accordance with ASTM1435	Virtually no fading
Wind	In accordance with ASTM5206	> 160MPH

\* Certified testing reports by independant laboratories








What is the Fast-Fit approach?  
New features that simplify installation!

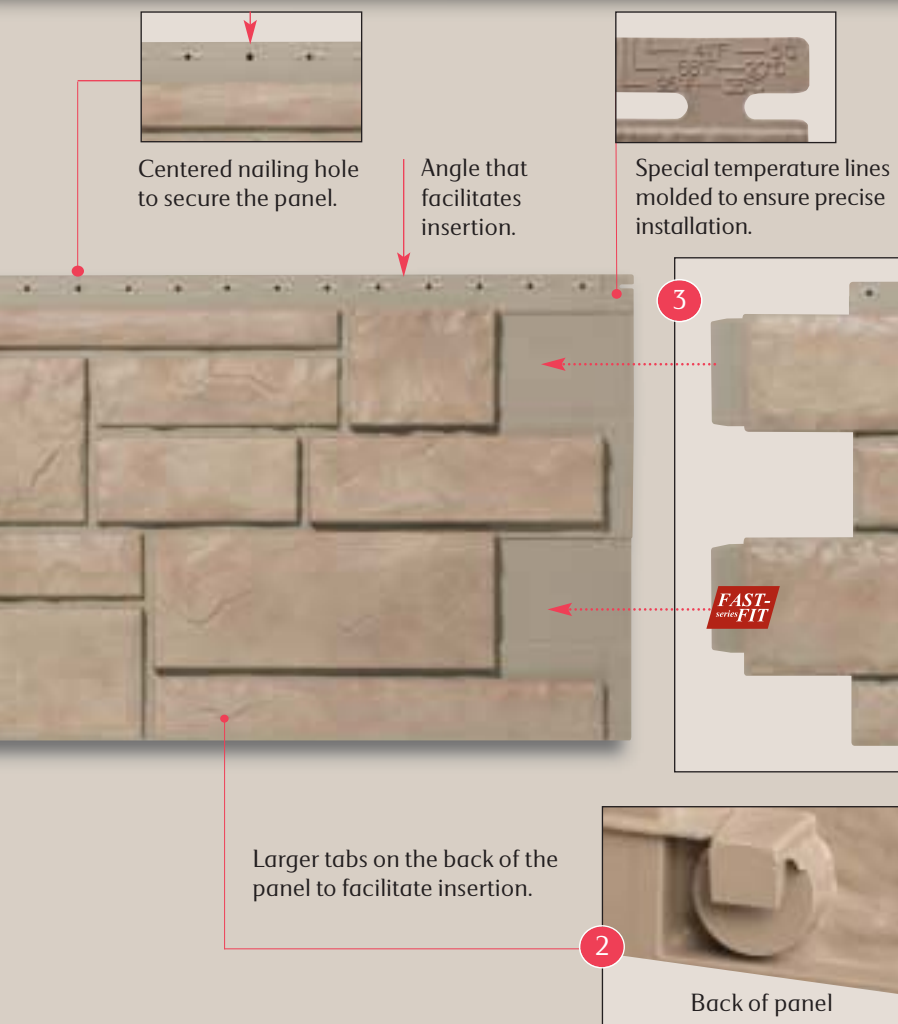



Widest selection of blended colors on the market.

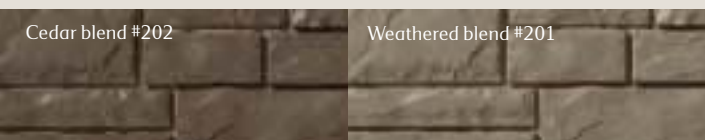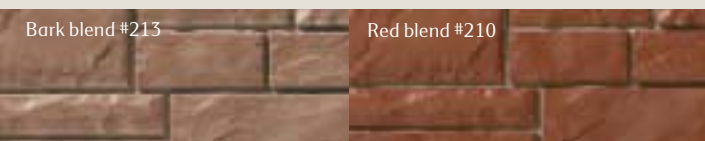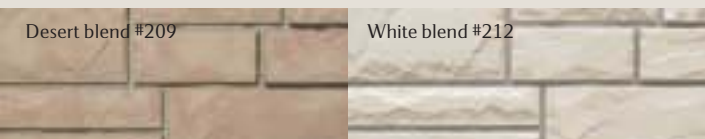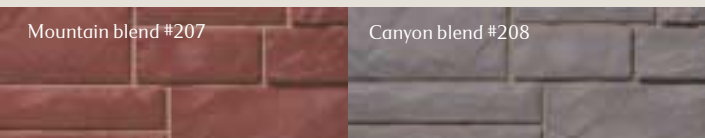

Actual colors may differ from those shown due to the printing process. Novik reserves the right to add or remove certain colors without notice. Check store samples.



**NOVIK**  
INNOVATIVE POLYMERS

Phone: 418.878.6161 Toll-Free: 888.847.8057

info@novik.com

www.novik.com